

TN002 ESD Target Calibration Method

Wayne (Wei) Huang, David Pommerenke

Ver. 2011.01.12

*ESDEMC Technology LLC,
4000 Enterprise Drive, Suite 103
Rolla, MO, 65401, US*

www.esdemc.com

info@esdemc.com

Tel: (+1) 573-202-6411

Fax: (+1) 877-641-9358

1. Calibration Objective:

The objective of this report is to calibrate the ESD target and check its performance and compare the results to the requirements of the IEC 61000-4-2 standard.

Requirements from IEC 61000-4-2 standard:

1. *Input Impedance of ESD target*



Figure 1. ESD Target

The ESD current target used to measure the discharge current from ESD generators should have input impedance between the inner electrode and ground $\leq 2.1 \text{ Ohm @ DC}$.

2. *Insertion Loss of the Target-Attenuator-Cable Chain*

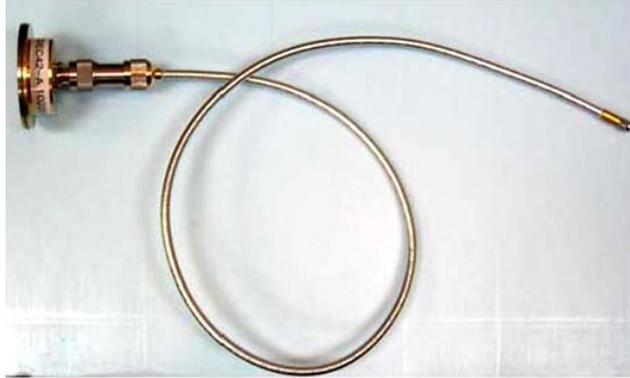


Figure 2 Target-Attenuator-Cable Chain

Instead of specifying the insertion loss of the ESD current target, the insertion loss of the measurement chain consisting of the target, attenuator and cable is specified. The variation of the insertion loss may not exceed:

+/- 0.5 dB up to 1 GHz
+/- 1.2 dB 1 to 4 GHz.

The nominal value S_{21} of the insertion loss:

$$S_{21} = 20 \cdot \log [2 \cdot Z_{\text{sys}} / (R_{\text{in}} + 50 \Omega)] \text{ dB}$$

Where R_{in} is the DC input impedance of the chain when loaded with 50 Ω .

2. Measurement Setup and Results:

1. For the input impedance

An LCR meter or an Ohm-meter should be used to measure the DC input impedance. The two electrodes should be connected in parallel to the input of the target. The target should be connected with the 20 dB attenuator, the cable and the 50-Ohm terminated. A value of around 2.00 Ohm should be measured.

2. For the frequency response

The ESD current target, attenuator and coax cable are attached to the target adapter for determination of the frequency response. The typical setup is shown in figure 1:

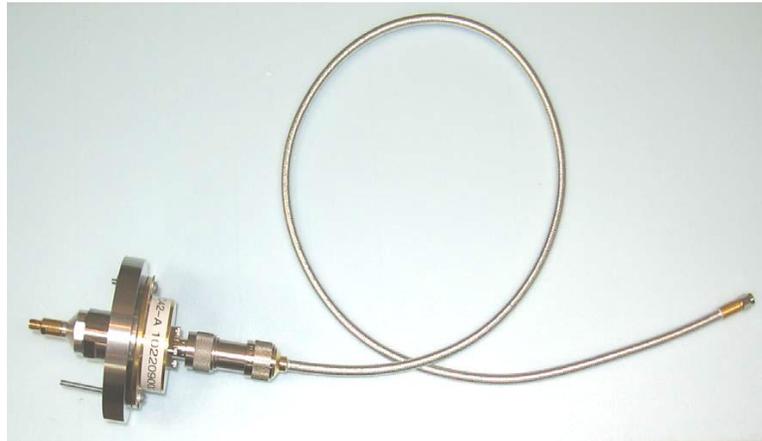


Figure 3 Mount ESD Target on to Target Adapter Line

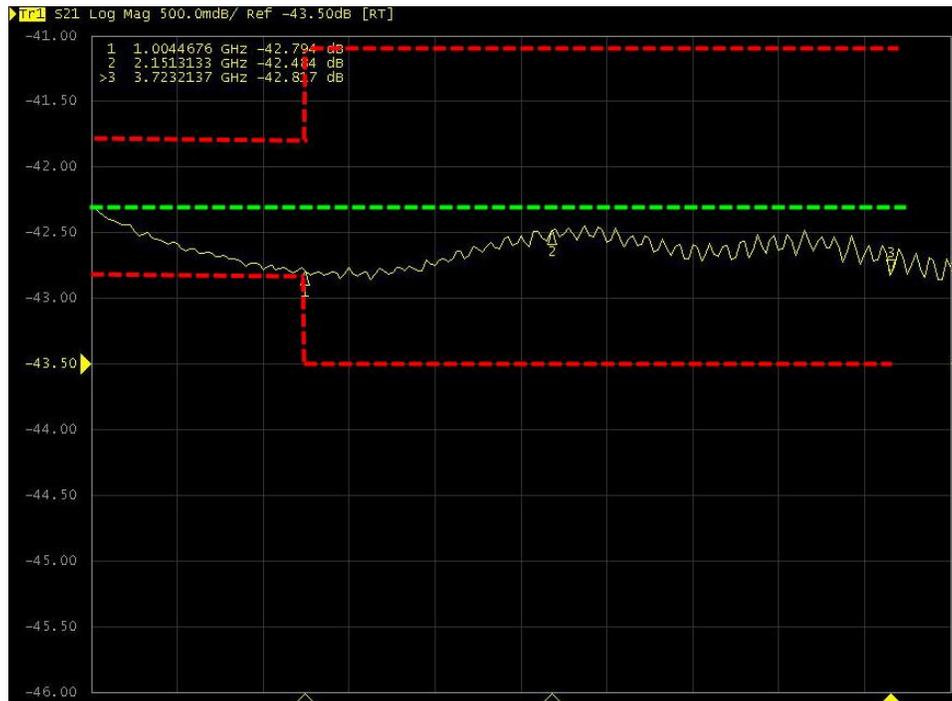


Figure 4 Insertion Loss of the Target-Attenuator-Cable Chain

For measuring insertion loss of the target-attenuator-cable chain, a network analyzer was used to measure the S21. The S21 result of the setup is shown on figure 2. The red dash lines are the limits from the ICE 61000-4-2 standard. So this ESD Target is within the spec per ICE 61000-4-2 standard.

3. Maintaining the Current Target Performance

The performance of the current target shall be verified at least every two years. It is sufficient to verify the DC-characteristics of the target. The rationale is that changes in the overall mechanical geometry are very unlikely, as they require a lot of force. The only place damage can occur is at the connector (inspect visually) and at the resistors due to excessive force on the center conductor of the target. If resistors break or get otherwise damaged these changes will be seen at DC and at high frequencies.

The test can be done by injecting a current of about 1 A into the target while terminating the target with 50-Ohm. The DC transfer impedance, defined as the voltage measured across the 50 Ohm termination divided by the input DC current of about 1A. It shall not deviate from the expected by more than 2%. Care must be taken to inject the current at two points that are different from the points at which the voltage is measured. This is typical for 4-wire resistance measurements. It is suggested to inject the current at the front side of the target and to measure the voltage on the back side of the target. A T-junction connector can be used to attach a DC voltage meter and a 50-Ohm termination at the same time. Often it is advisable to perform the test with two opposing polarities of the DC current and to take the average of the two resistance readings. This cancels effects of thermal voltages that might occur across contacts of different material. A direct use of a 4-wire, 4-contact impedance meter might lead to unstable results as long as the target is mounted in a large ground plane, due to noise coupled into the 4-wire, 4-contact connection setup. It is suggested to test the measurement setup on a known, low impedance (e.g., 10ohm) resistor at first.

Reference: **IEC 61000-4-2 standard ed2.0 - 2008**

ESDEMC Technology, 4000 Enterprise Dr, Rolla, MO, 65401, US www.esdemc.com

Toll free: 877-864-8479 Fax: (+1) 877-641-9358 Email: info@esdemc.com